

OIKO PRO FAMILY
FOCUS OF ATTENTION

OIKO PRO FAMILY CATALOGUE | AUGUST 2023
ENGLISH

All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated. All changes and adaptations that serve to improve our products can be carried out without prior notice.

The latest data sheets can be configured at www.prolicht.at

PROLICHT MAKES A DIFFERENCE

If you promise your demanding clients bespoke, high-tech, quality products, you can't have them made just anywhere. We manufacture our products where the best trained technicians, engineers and designers find themselves at home: right in the middle of the Tyrolean Alps.

At the end of the day, it is their skill that makes a difference. And it is their expertise that has made PROLICHT one of the world's most successful premium manufacturers of architectural lighting concepts. Sustainably produced and custom made in Europe.




PROLICHT





YOUR PROJECT
MAKES YOUR PRODUCT


OVERVIEW
OIKO PRO FAMILY

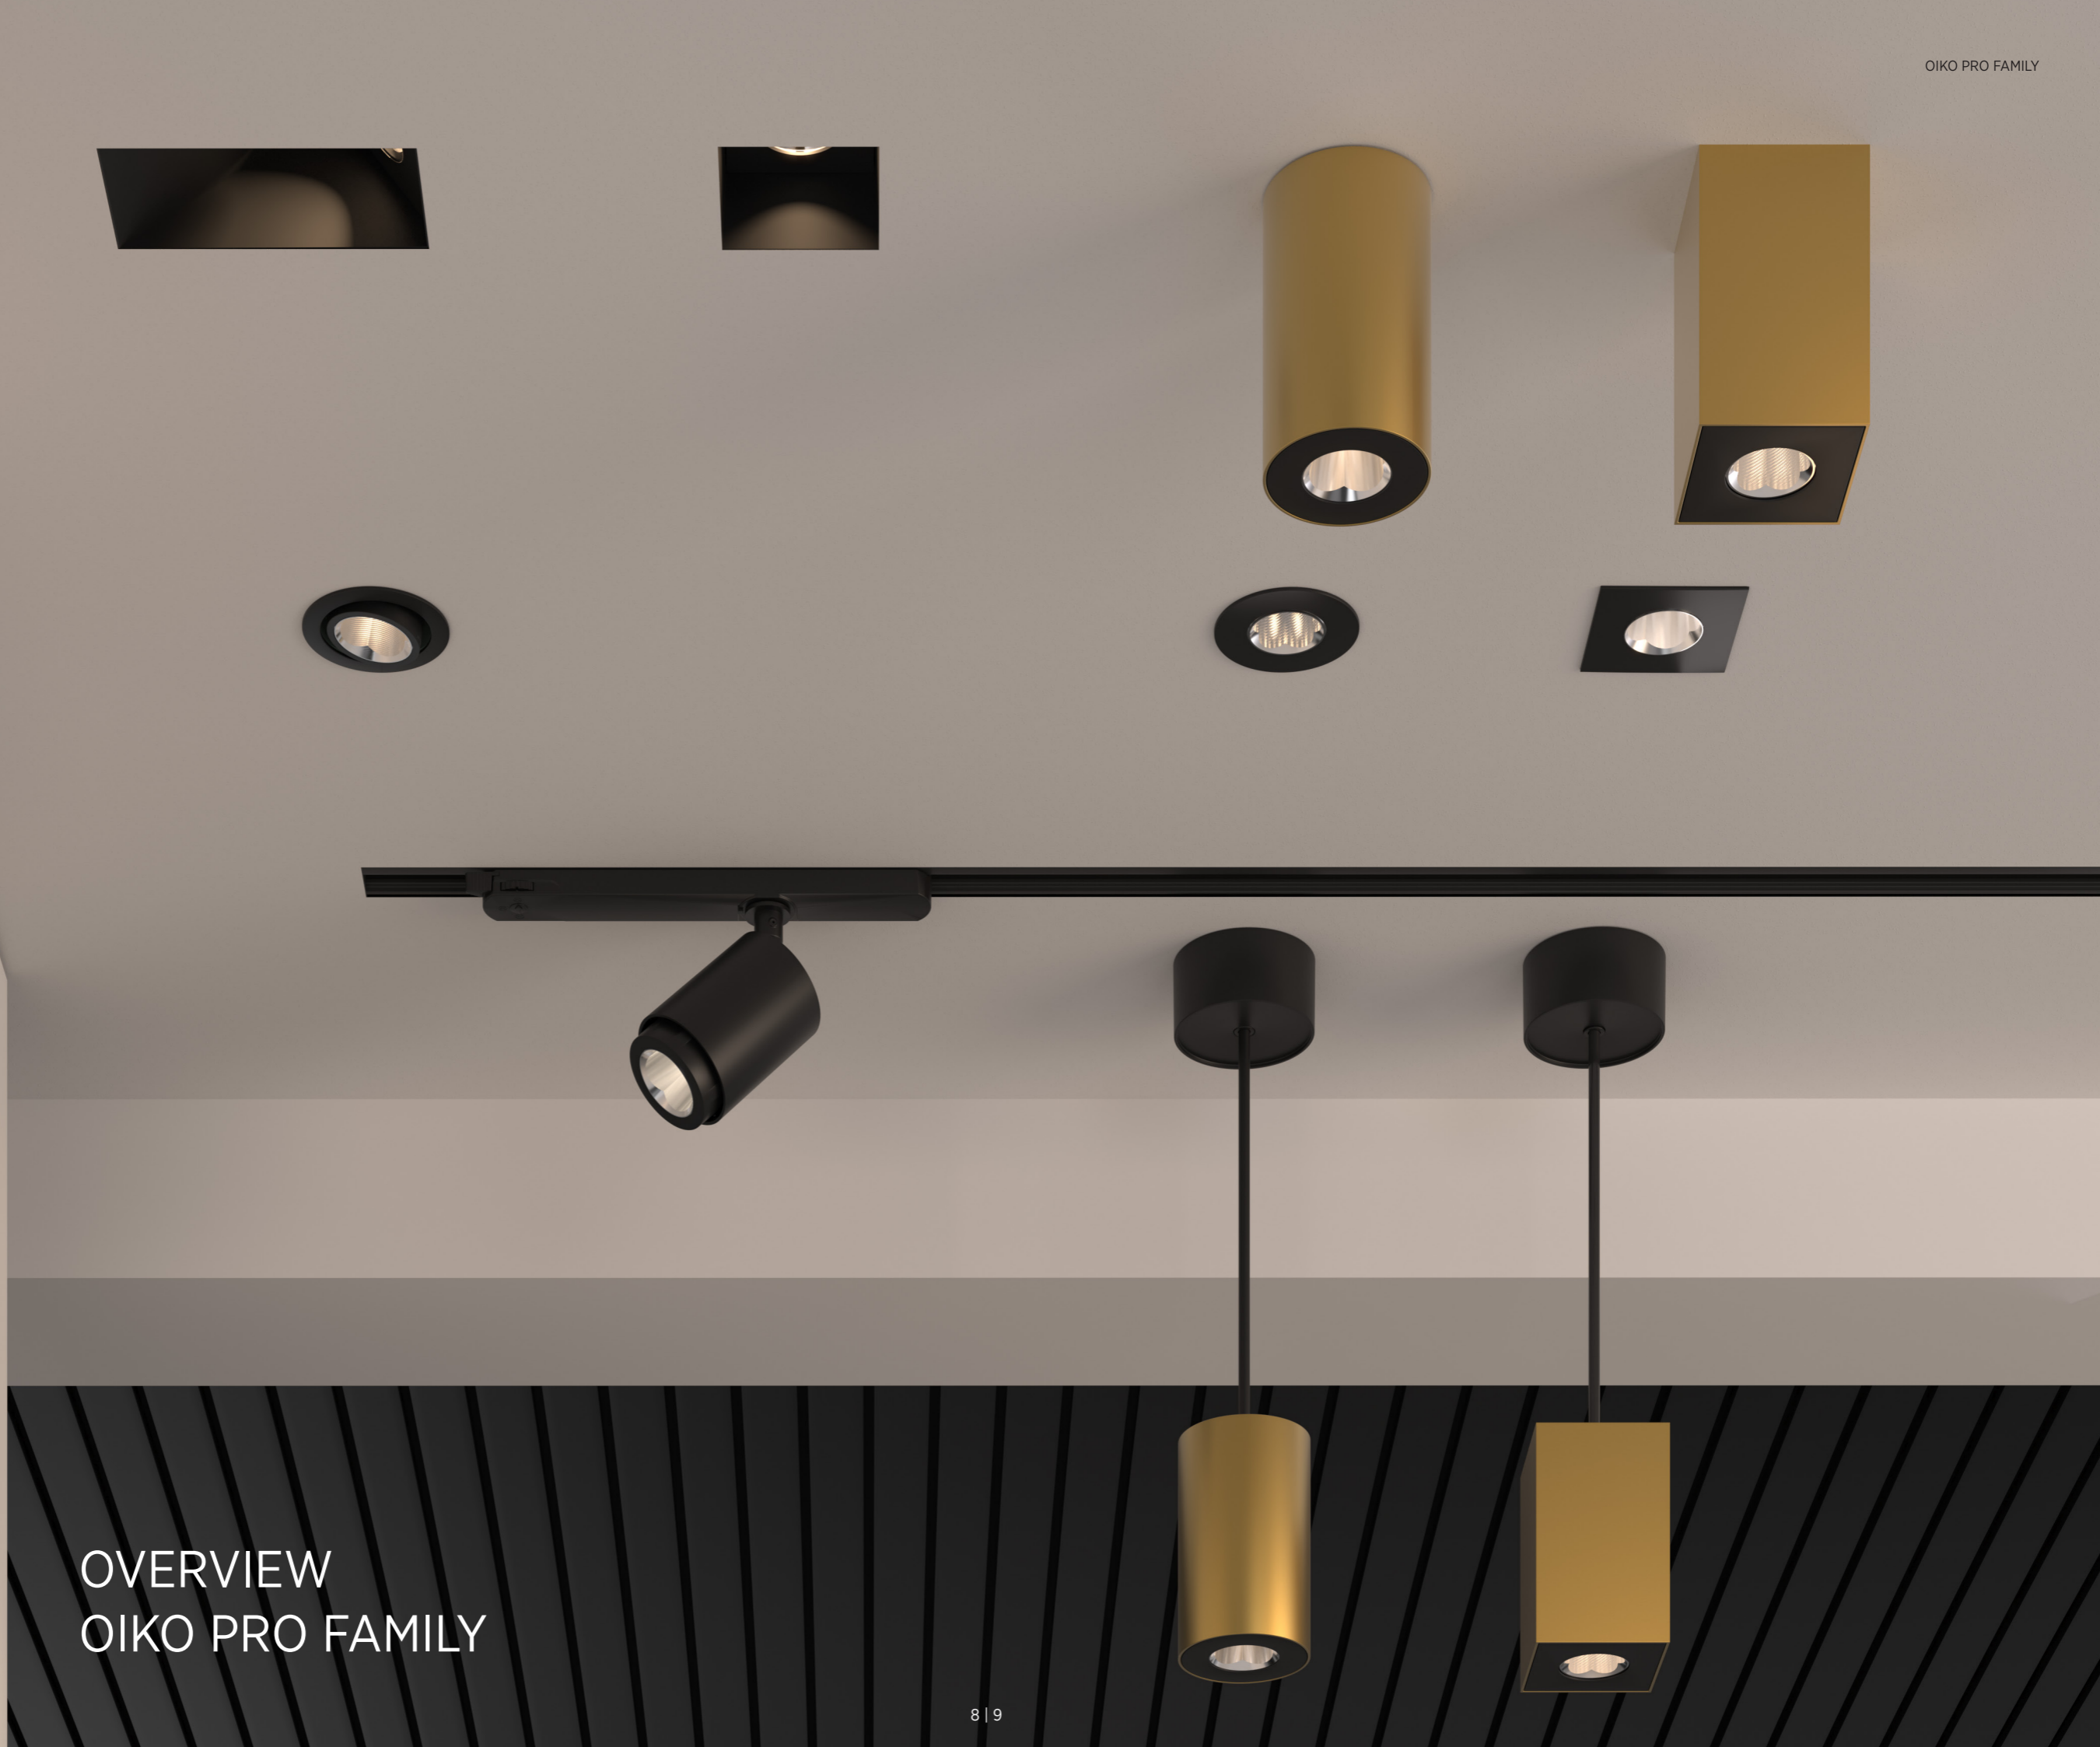



ROUND

RECESSED



OIKO PRO

TRIMLESS



CONCRETE



SURFACE



OIKO PRO ROUND

SUSPENDED



OIKO PRO ROUND


TRACK




OIKO PRO IN



OIKO PRO ADJUSTABLE



SQUARE



OIKO PRO SQUARE



OIKO PRO SQUARE



OIKO PRO SQUARE



OIKO PRO SQUARE COMFORT



OIKO PRO SQUARE COMFORT ASYMMETRIC


OIKO PRO OVERVIEW

1 CUT OUT Ø 68 mm


2 SHAPES



2 ADJUSTMENTS

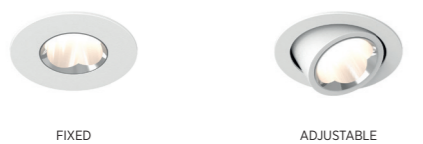

5 MOUNTING POSSIBILITIES

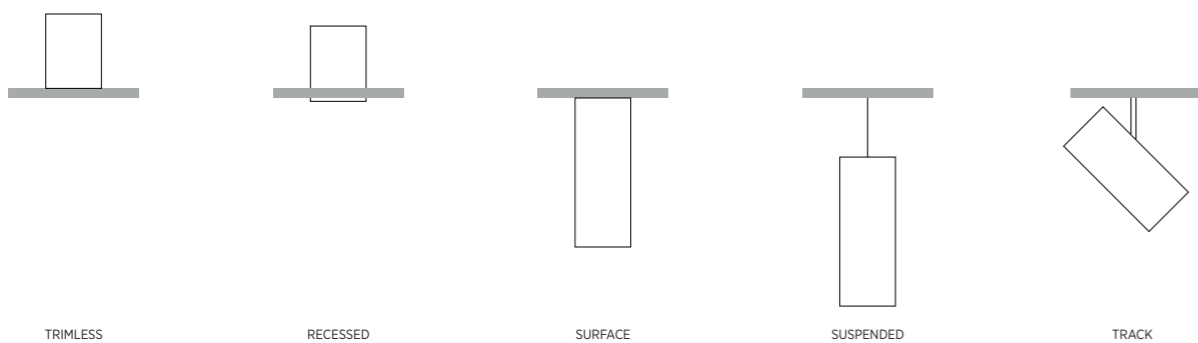


5 OPTICS




LENS PACK



PERFORMANCE

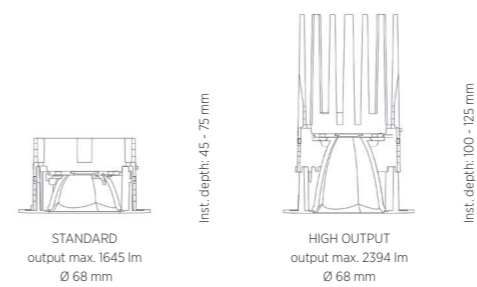


CEILING

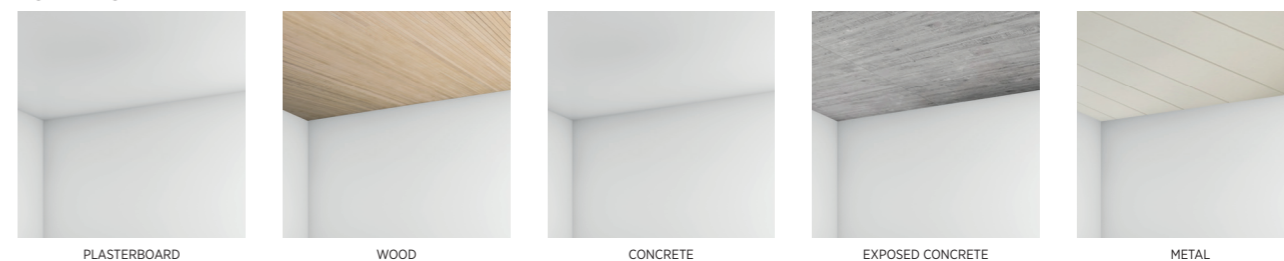


IP INTERNAL PROTECTION

IP20 + IP54

COLOR TEMPERATURE CCT

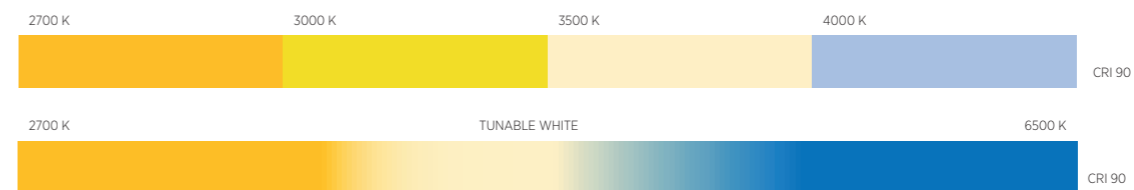

RAL Classic or any other special color on request

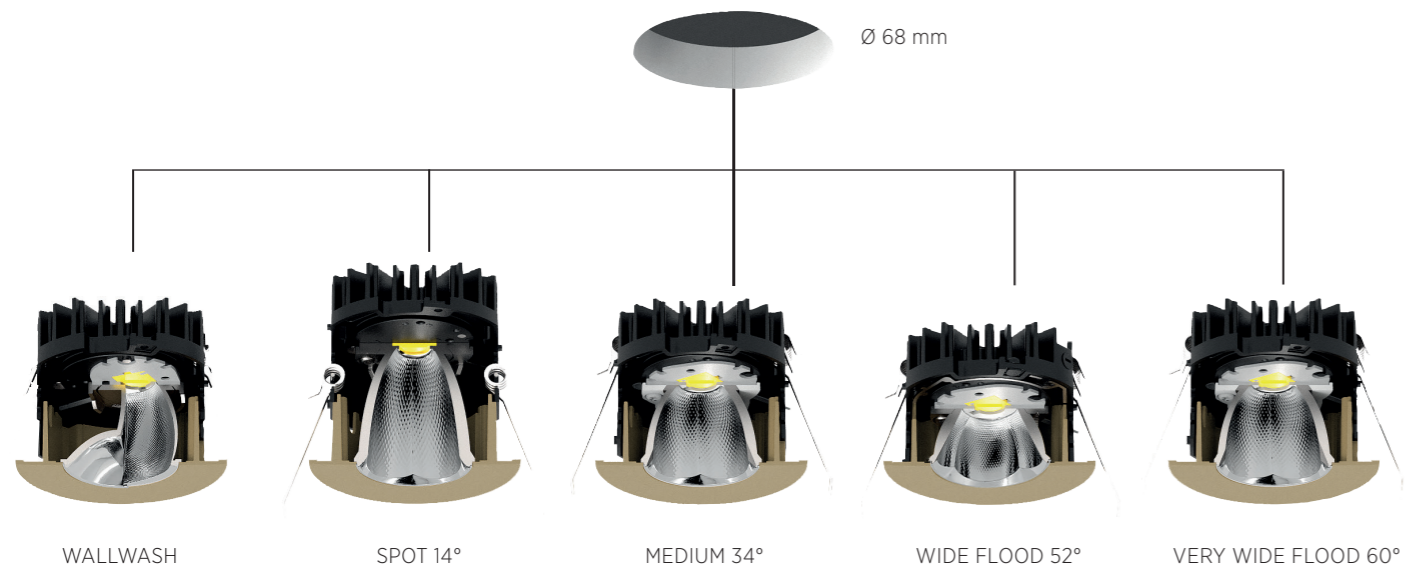


ONE SIZE - INFINITE APPLICATIONS


The OIKO PRO's housing is specifically designed for a simple installation with a standard Ø 68 mm cut-out offering a consistent visual appearance for a variety of functions.

STATE-OF-THE-ART REFLECTOR TECHNOLOGY

The most advanced optics used in all OIKO PRO luminaires offer the purest beam angles. The result is holistic light control without any secondary light beams and perfect light distribution even for the Tunable White LED source. Beam angles of 14°, 34°, 52° 60° and a WALLWASH version are available and guarantee the same light quality throughout the range.

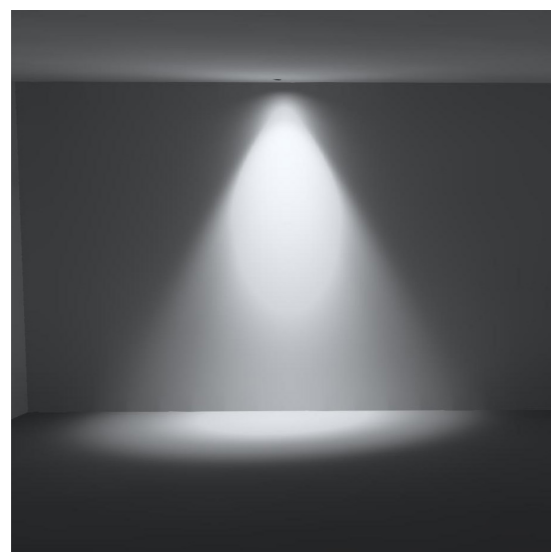

STANDARD BEAM


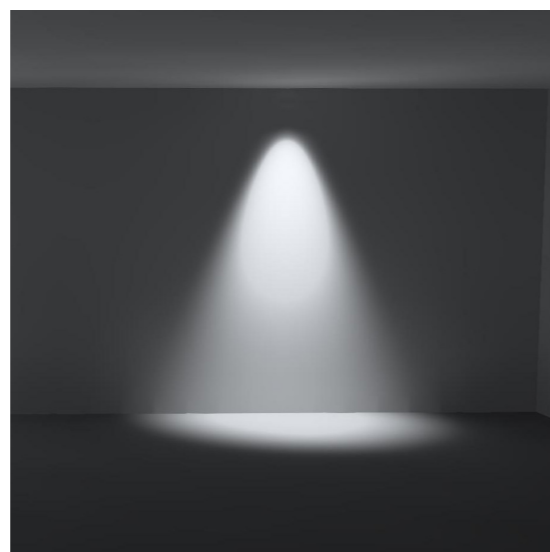


OIKO PRO BEAM



DUAL WALLWASH FUNCTION

The OIKO PRO features unique optics, capable of perfectly illuminating a vertical surface while serving as a downlight at the same time. OIKO PRO is the perfect tool for lighting designers.

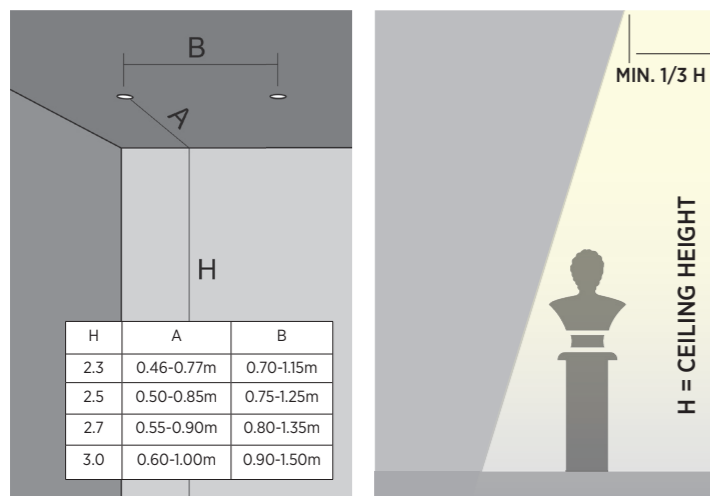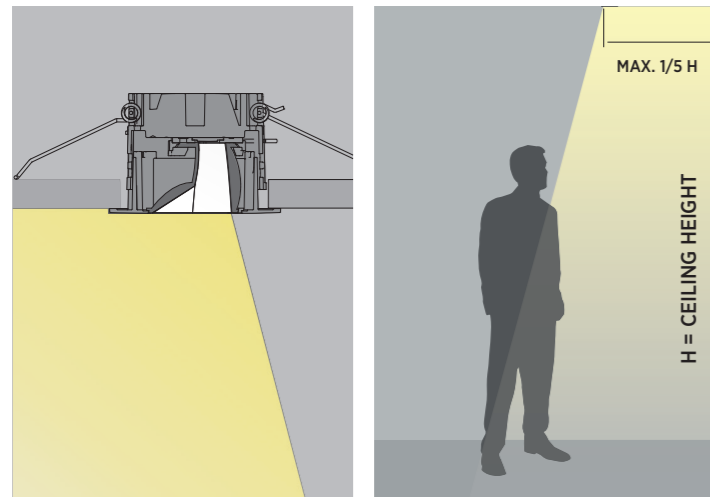

RECOMMENDED WALLWASH DISTANCES





INSPIRATION | BRANDSHOOT

OIKO PRO ADJUSTABLE | COLOR 25 GUN METAL

OIKO PRO ADJUSTABLE


OIKO PRO ADJUSTABLE delivers light exactly where it is needed. The mechanism is easy to use and needs no tools to be adjusted. This is enabled by an almost invisible notch on the spotlight - create the light setting you need for your space in the easiest way. Swiveling from 0° - 25° and a rotation from 0° - 355° is possible. When the luminaire is tilted, no secondary light falls on the casing which avoids disturbing reflections.



OIKO PRO ADJUSTABLE



OIKO PRO ADJUSTABLE | SUPERSPOT

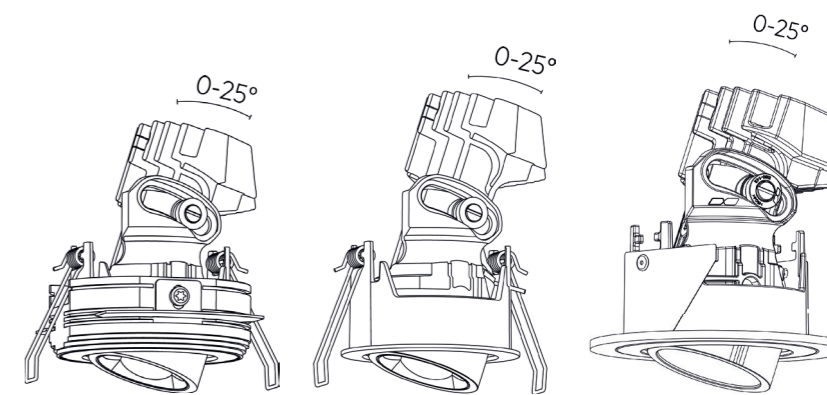

OIKO PRO ADJUSTABLE | TRIMLESS

OIKO PRO ADJUSTABLE | RECESSED


OIKO PRO ADJUSTABLE | CONCRETE

OIKO PRO SQUARE CONCRETE


OIKO PRO offers numerous benefits that support you in fulfilling your lighting vision. For concrete installations, a special version for OIKO PRO SQUARE and ROUND was created to complete its universal application.



also available as OIKO PRO ROUND CONCRETE

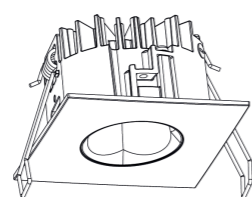

OIKO PRO SQUARE



OIKO PRO SQUARE | CONCRETE



INSPIRATION | BIEFFÉ

OIKO PRO SQUARE CONCRETE | COLOR 25 GUN METAL



INSPIRATION | BIEFFE

OIKO PRO SQUARE COMFORT

OIKO PRO SQUARE COMFORT is designed to create colorful accents in ceilings without disturbing the atmosphere. Its casing can be individualized in the 25 PROLICHT colors and is discreetly illuminated by the emitted light.



OIKO PRO SQUARE COMFORT | ASYMMETRIC



OIKO PRO SQUARE COMFORT | TRIMLESS



OIKO PRO SQUARE COMFORT | RECESSED




INSPIRATION: HOZING STUDIO

OIKO PRO ROUND SURFACE | HOUSING COLOR 25 GUN METAL, FRAME COLOR 03 CRYSTAL WHITE




OIKO PRO SURFACE

The surface-mounted version adds another mounting method to the OIKO PRO family. The form factor of the product families is maintained to guarantee a consistent appearance across all applications.



OIKO PRO ROUND | SURFACE

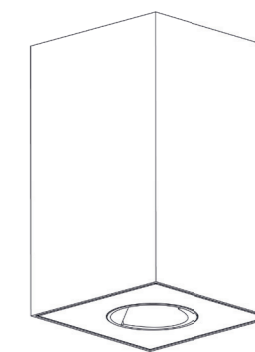



OIKO PRO SQUARE | SURFACE



INSPIRATION | MOZING STUDIO

OIKO PRO SURFACE ONE SIZE - 2 SHAPES

The surface-mounted version of our OIKO PRO is characterized by its high-quality housing in a compact size: Ø 75 x 125 mm. The driver of the luminaires is despite the small size integrated into the housing and can be configured as DALI or an ON/OFF version.

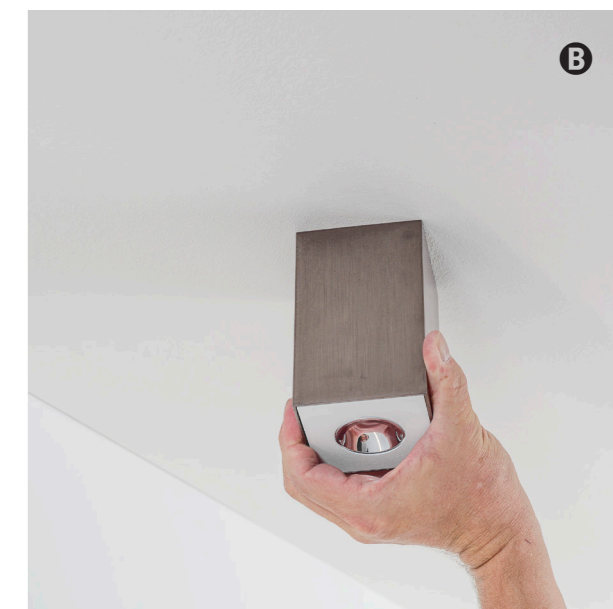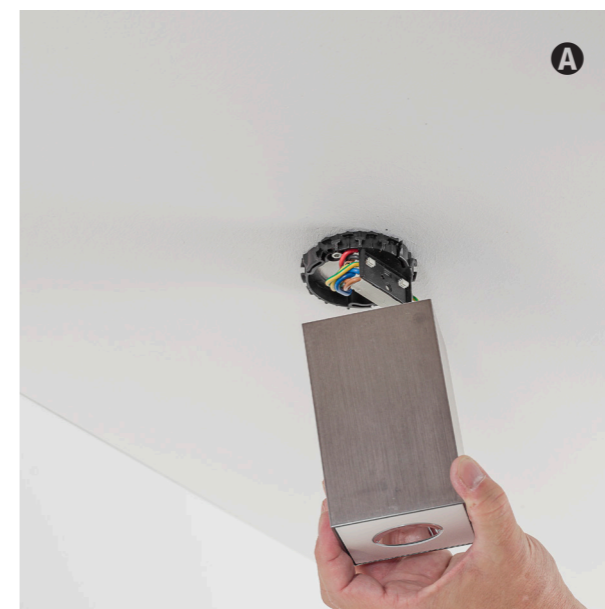


The installation of the OIKO PRO surface-mounted luminaires is extremely simple and quick, regardless of the shape of the housing. The luminaire housing can be plugged onto the plastic mounting ring without tools. This means that no screws or retaining elements are visible and the minimalist appearance of the spotlight is retained.

An easy alignment, even with the wallwash reflector in the square housing, parallel to a wall is possible due to the possibility of an adjustment of 3° up to 120°.



PHOTO | ARMIN KUPRIAN

OIKO PRO ROUND SURFACE | HOUSING COLOR 25 GUN METAL, FRAME COLOR 03 CRYSTAL WHITE

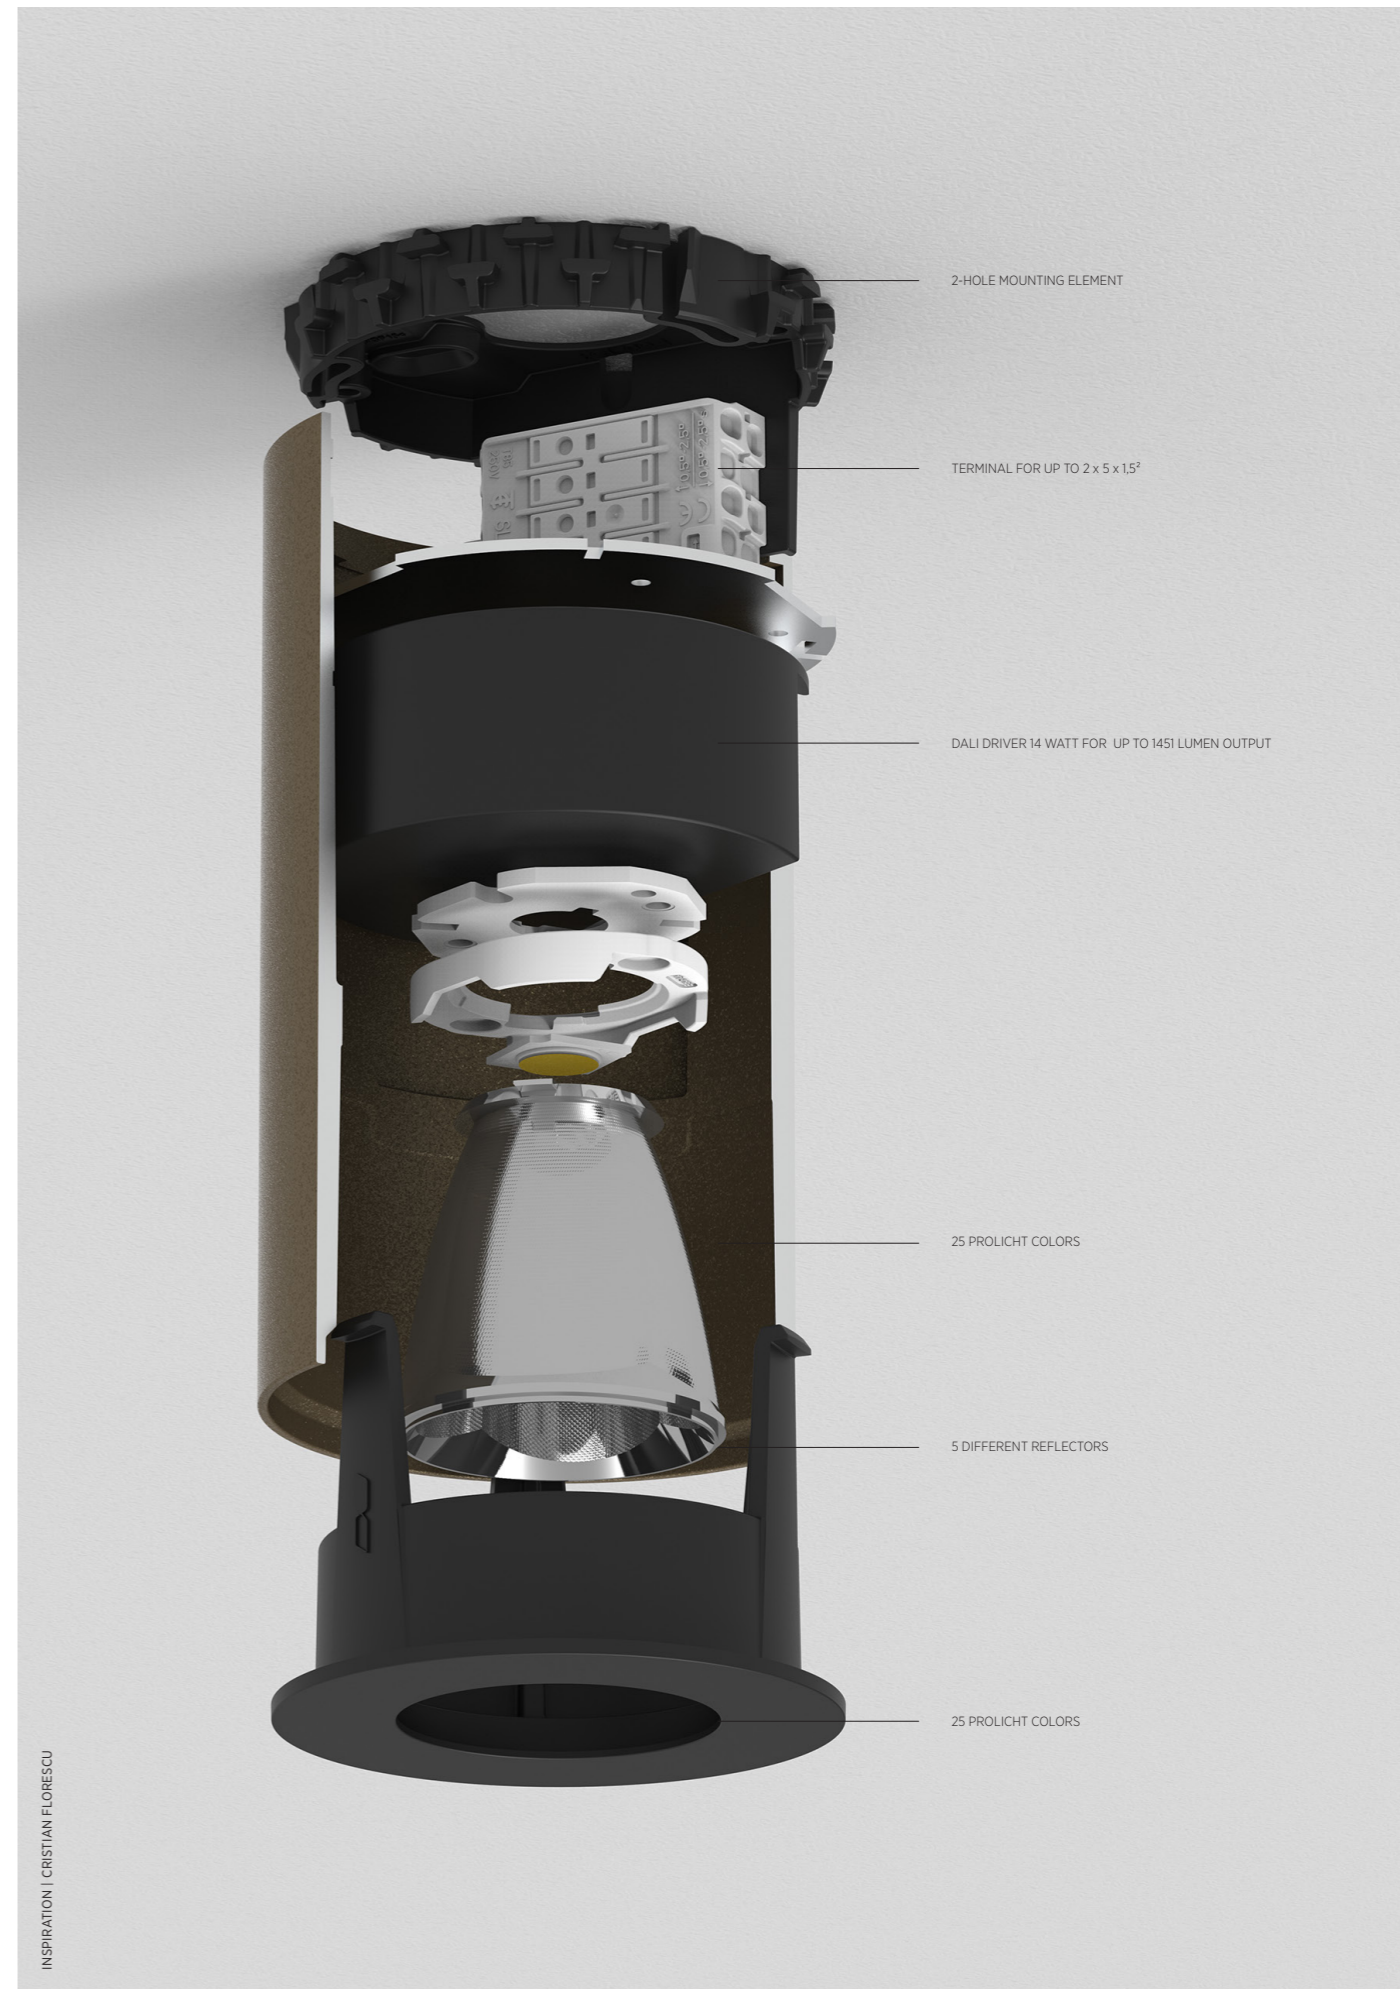

INSPIRATION | CRISTIAN FLORESCU



INSPIRATION | MOZING STUDIO

OIKO PRO SUSPENDED | COLOR 29 JAZZ GOLD | TEXTILE CABLE BLACK




INSPIRATION | BRANDSHOOT




OIKO PRO SUSPENDED

OIKO PRO also available in different shapes in the suspended version. You decide whether round or square better suits your design vision. To match the luminaire down to the finest detail to the room concept or set accents, OIKO PRO can be equipped with four different textile cables in lengths up to 6000 mm.

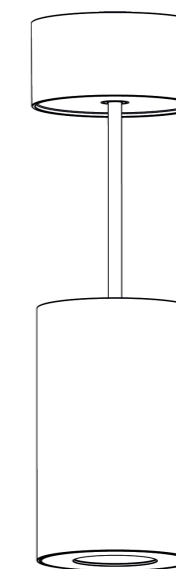

OIKO PRO ROUND SUSPENDED

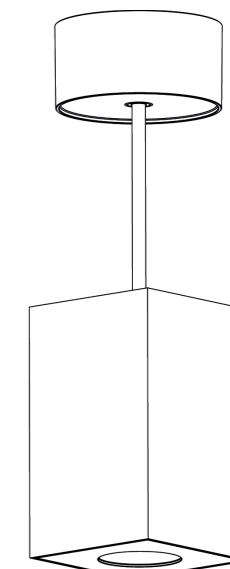

OIKO PRO SQUARE SUSPENDED



INSPIRATION | MOZING STUDIO

OIKO PRO SQUARE SUSPENDED




INSPIRATION | BRANDSHOOT

OIKO PRO IN: COLOR 27 COPPER MINE | TRACK: COLOR 02 BLACK VELVET



OIKO PRO IN
3 PHASE - & 2LOOK4 50 - TRACK



Our OIKO PRO IN spotlights are changing the RETAIL lighting market substantially. Available in a wide variety of designs, the spotlights can now also be used with the 2LOOK4 50 track and enable flexible state-of-the-art lighting design at a fair price.



PHOTO | GÜNTHER EGGER




To support a consistent and harmonious interior concept, various components of the Lighting system can be individually configured in our 25 PROLICHT colors. In addition to the consistent design in black, a newly available adapter allows a complete configuration in white for a discreet design that directs the attention to the light.

CHOOSE YOUR COLOR



WWW.PROLICHT.AT

CONFIGURATION MAKES A DIFFERENCE

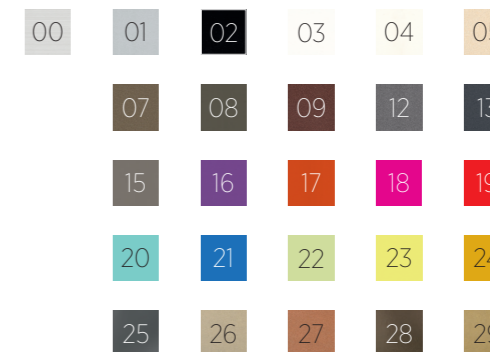

RAL Classic or any other special color on request


Luminaires play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.



MAKE IT YOURS!

CONFIGURE ONLINE:
WWW.PROLICHT.AT/OIKO

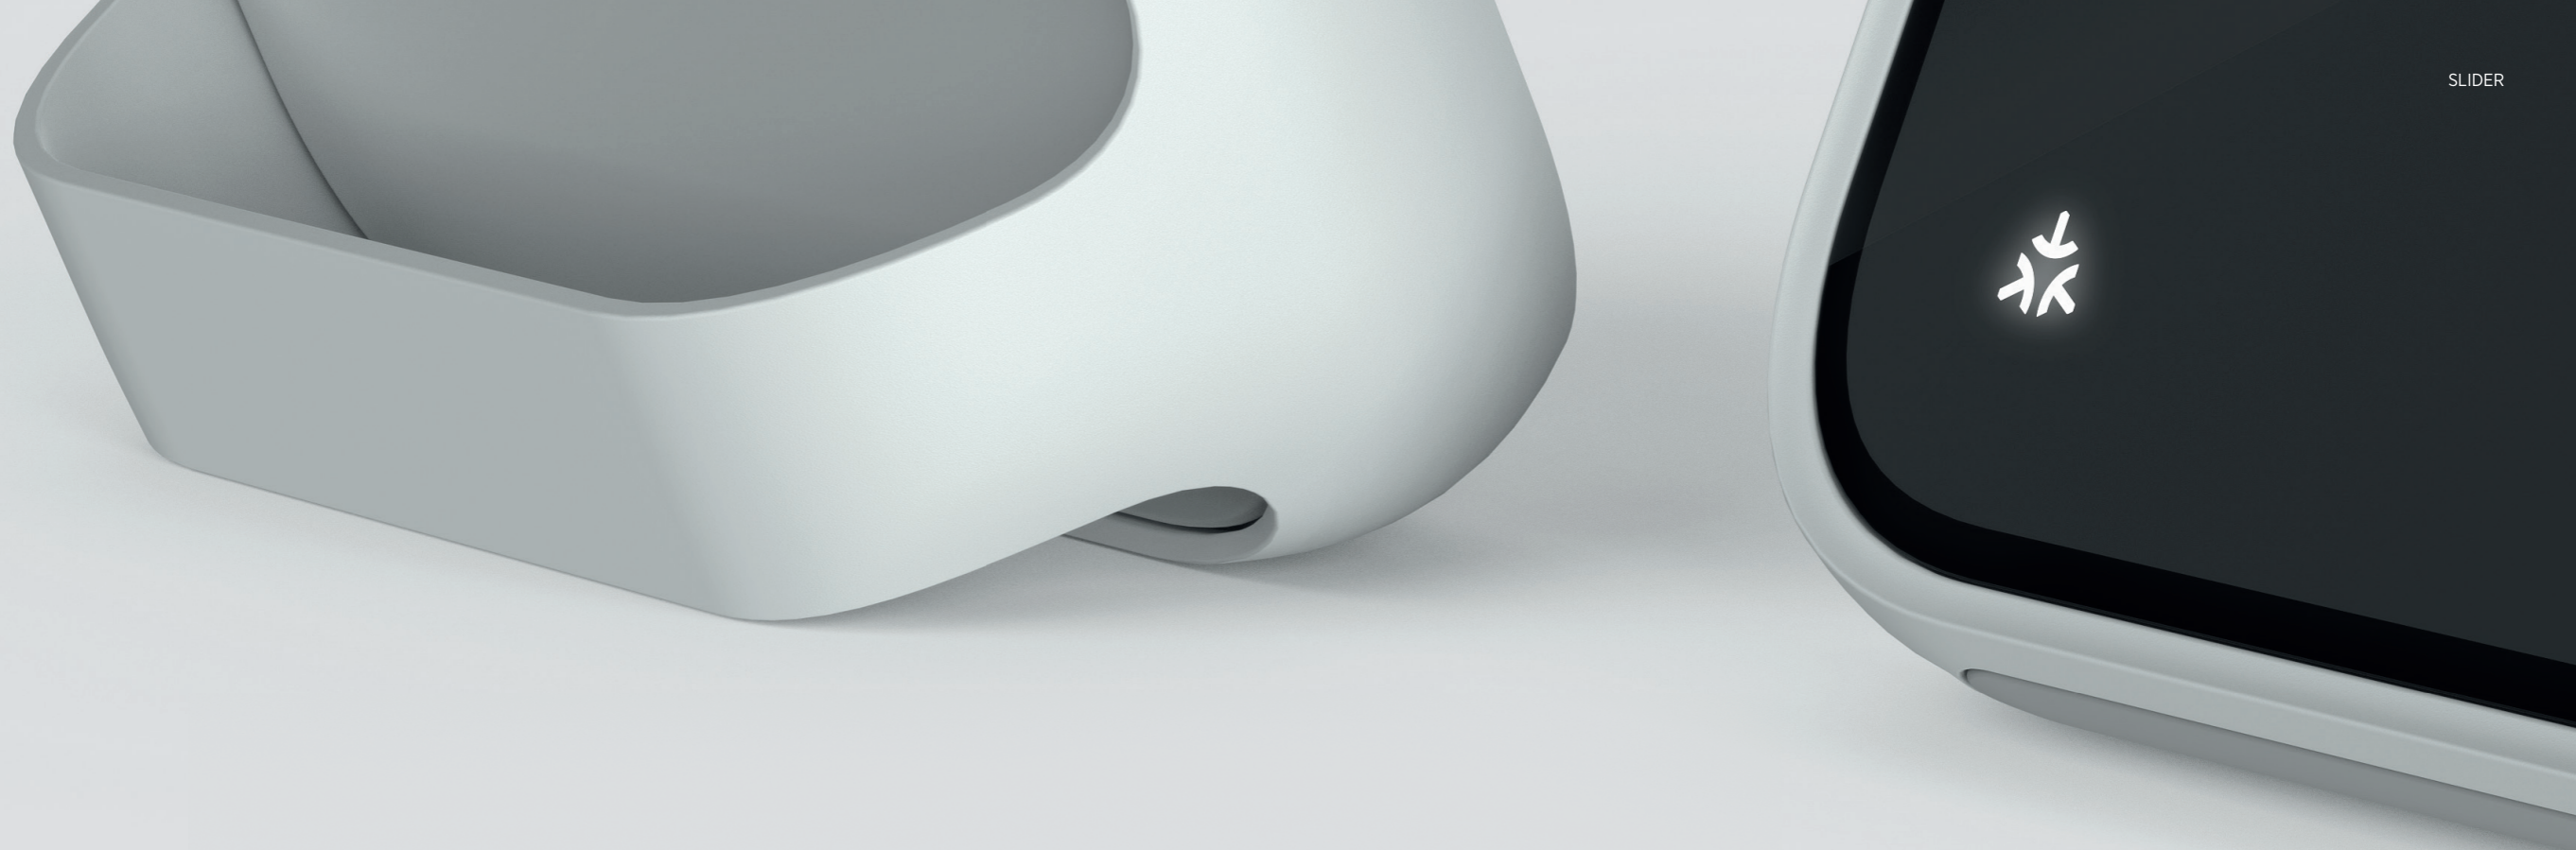

THE NEW SYMBOL OF CONNECTIVITY!

Imagine a world where all your devices seamlessly work together.
The idea is simple. The impact is powerful.

OUR PRODUCTS ARE READY!

Configure now your MATTER enabled lighting solution.
PROLICHT is offering as one of the first companies in the lighting industry, the standard matter for more than 1.000 light fittings in over 50.000 possible configurations. From now on our downlights, tracks and luminaires can be controlled together with your other devices in your smart home via just one interface.

THE FIRST SMART LIGHTING SHOWROOM IN THE WORLD

Learn about all the ways you can integrate the new standard into your project and make your lighting smart.
You want to visit us? We are looking forward to welcome you in the heart of the Alps!



All PROLICHT Matter light fittings work natively with Apple Home, Google Home, Amazon Alexa and Samsung SmartThings and with many other home automation control systems.

THE FUTURE IS NOW!


PROLICHT WORKS WITH MATTER






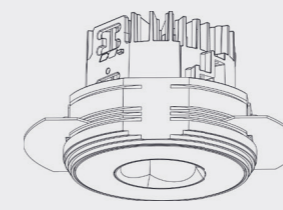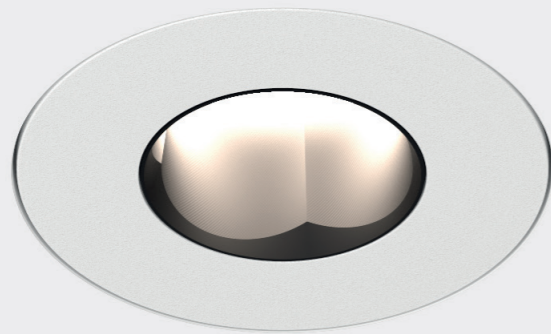

TRIMLESS
Ø 75 mm | 86 mm



RECESSED
Ø 75 mm | 68 mm



CONCRETE
Ø 95 mm | 68 mm

OIKO PRO ROUND | TRIMLESS


POWER

14 - 24 WATT


IP INTERNATIONAL PROTECTION

IP20 + IP54


INSTALLATION

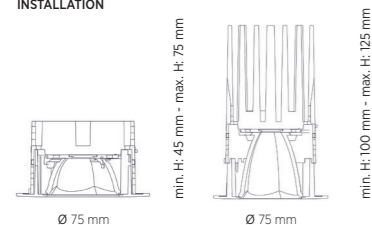

COLOR TEMPERATURE CCT

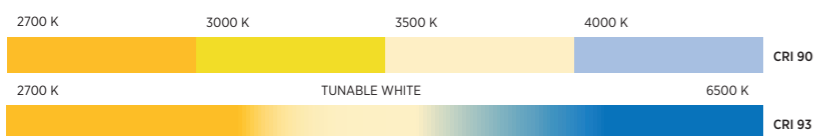

BEAMWIDTH



LENS PACK



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

OIKO PRO ROUND



VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	INSTALLATION DEPTH MIN. mm *	ART-N° TRIMLESS	ART-N° RECESSED	ART-N° CONCRETE
	2700	3000	3500	4000	1462	16	90	IP20	WALLWASH	55	120-0470	220-0830	220-0850
	2700	3000	3500	4000	1220	16	90	IP20	SPOT 14°	70	120-0471	220-0831	220-0851
	2700	3000	3500	4000	1455	16	90	IP20	MEDIUM 34°	70	120-0472	220-0832	220-0852
	2700	3000	3500	4000	1545	16	90	IP20	WIDE FLOOD 50°	55	120-0473	220-0833	220-0853
	2700	3000	3500	4000	1645	16	90	IP20	VERY WIDE FLOOD 60°	50	120-0474	220-0834	220-0854
	TUNABLE WHITE 2700 - 6500				1216	14	90	IP20	WALLWASH	55	120-0475	220-0835	220-0855
	TUNABLE WHITE 2700 - 6500				1129	14	90	IP20	FLOOD 36°	70	120-0477	220-0837	220-0857
	TUNABLE WHITE 2700 - 6500				1240	14	90	IP20	WIDE FLOOD 52°	55	120-0478	220-0838	220-0858
	TUNABLE WHITE 2700 - 6500				1381	14	90	IP20	VERY WIDE FLOOD 62°	50	120-0479	220-0839	220-0859
	2700	3000	3500	4000	1400	16	90	IP54	WALLWASH	60	•	220-0840	220-0860
	2700	3000	3500	4000	1017	16	90	IP54	SPOT 14°	75	•	220-0841	220-0861
	2700	3000	3500	4000	1408	16	90	IP54	MEDIUM 34°	75	•	220-0842	220-0862
	2700	3000	3500	4000	1471	16	90	IP54	WIDE FLOOD 50°	60	•	220-0843	220-0863
	2700	3000	3500	4000	1501	16	90	IP54	VERY WIDE FLOOD 60°	55	•	220-0844	220-0864
	TUNABLE WHITE 2700 - 6500				1159	14	90	IP54	WALLWASH	60	•	220-0845	220-0865
	TUNABLE WHITE 2700 - 6500				1116	14	90	IP54	FLOOD 36°	75	•	220-0847	220-0867
	TUNABLE WHITE 2700 - 6500				1176	14	90	IP54	WIDE FLOOD 52°	60	•	220-0848	220-0868
	TUNABLE WHITE 2700 - 6500				1319	14	90	IP54	VERY WIDE FLOOD 62°	55	•	220-0849	220-0869
HIGH OUTPUT	2700	3000	3500	4000	2128	24	90	IP20	WALLWASH	105	•	220-0980	220-1000
HIGH OUTPUT	2700	3000	3500	4000	1461	21	90	IP20	SPOT 14°	120	•	220-0981	220-1001
HIGH OUTPUT	2700	3000	3500	4000	2118	21	90	IP20	MEDIUM 34°	120	•	220-0982	220-1002
HIGH OUTPUT	2700	3000	3500	4000	2248	21	90	IP20	WIDE FLOOD 50°	105	•	220-0983	220-1003
HIGH OUTPUT	2700	3000	3500	4000	2394	21	90	IP20	VERY WIDE FLOOD 60°	100	•	220-0984	220-1004
HIGH OUTPUT	2700	3000	3500	4000	2038	24	90	IP54	WALLWASH	110	•	220-0990	220-1010
HIGH OUTPUT	2700	3000	3500	4000	1388	21	90	IP54	SPOT 14°	125	•	220-0991	220-1011
HIGH OUTPUT	2700	3000	3500	4000	2049	21	90	IP54	MEDIUM 34°	125	•	220-0992	220-1012
HIGH OUTPUT	2700	3000	3500	4000	2141	21	90	IP54	WIDE FLOOD 50°	110	•	220-0993	220-1013
HIGH OUTPUT	2700	3000	3500	4000	2272	21	90	IP54	VERY WIDE FLOOD 60°	105	•	220-0994	220-1014

* The installation depth may vary due to the selection of the driver

POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V



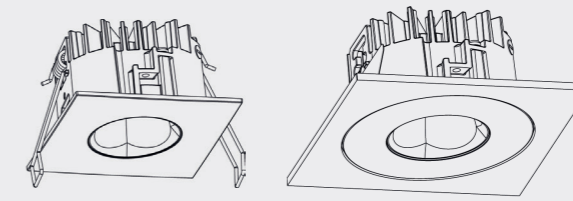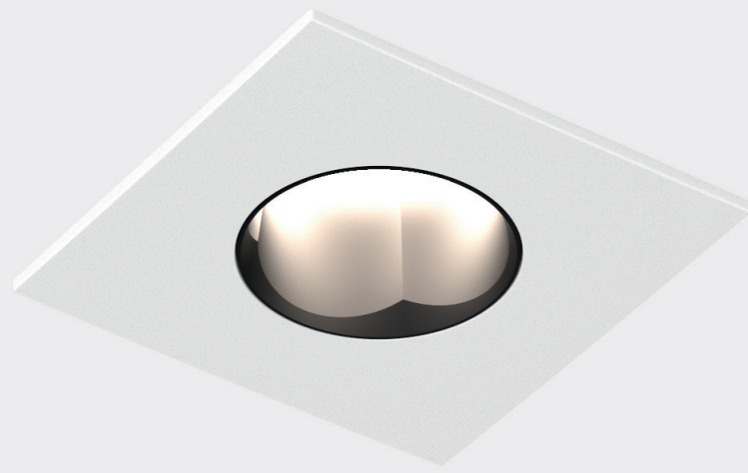

RECESSED
■ 75 mm | 🌀 68 mm

CONCRETE
■ 95 mm | 🌀 86 mm

OIKO PRO SQUARE | RECESSED


POWER

14 - 24 WATT


IP International Protection

IP20 + IP54


INSTALLATION

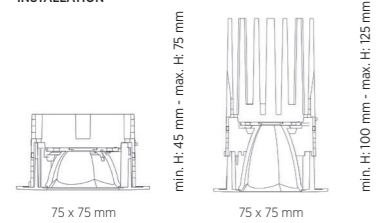

COLOR TEMPERATURE CCT

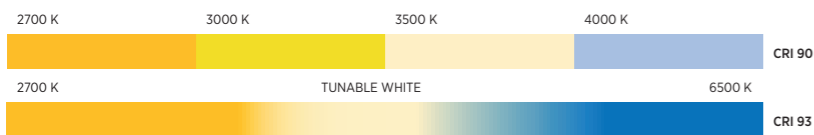

BEAMWIDTH



LENS PACK



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

OIKO PRO SQUARE



VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	INSTALLATION DEPTH MIN. mm *	ART-N° RECESSED	ART-N° CONCRETE
	2700	3000	3500	4000	1462	16	90	IP20	WALLWASH	55	220-0880	220-0900
	2700	3000	3500	4000	1220	16	90	IP20	SPOT 14°	70	220-0881	220-0901
	2700	3000	3500	4000	1455	16	90	IP20	MEDIUM 34°	70	220-0882	220-0902
	2700	3000	3500	4000	1545	16	90	IP20	WIDE FLOOD 50°	55	220-0883	220-0903
	2700	3000	3500	4000	1645	16	90	IP20	VERY WIDE FLOOD 60°	50	220-0884	220-0904
	TUNABLE WHITE 2700 - 6500				1216	14	90	IP20	WALLWASH	55	220-0885	220-0905
	TUNABLE WHITE 2700 - 6500				1129	14	90	IP20	FLOOD 36°	70	220-0887	220-0907
	TUNABLE WHITE 2700 - 6500				1240	14	90	IP20	WIDE FLOOD 52°	55	220-0888	220-0908
	TUNABLE WHITE 2700 - 6500				1381	14	90	IP20	VERY WIDE FLOOD 62°	50	220-0889	220-0909
	2700	3000	3500	4000	1400	16	90	IP54	WALLWASH	60	220-0890	220-0910
	2700	3000	3500	4000	1017	16	90	IP54	SPOT 14°	75	220-0891	220-0911
	2700	3000	3500	4000	1408	16	90	IP54	MEDIUM 34°	75	220-0892	220-0912
	2700	3000	3500	4000	1471	16	90	IP54	WIDE FLOOD 50°	60	220-0893	220-0913
	2700	3000	3500	4000	1501	16	90	IP54	VERY WIDE FLOOD 60°	55	220-0894	220-0914
	TUNABLE WHITE 2700 - 6500				1159	14	90	IP54	WALLWASH	60	220-0895	220-0915
	TUNABLE WHITE 2700 - 6500				1116	14	90	IP54	FLOOD 36°	75	220-0897	220-0917
	TUNABLE WHITE 2700 - 6500				1176	14	90	IP54	WIDE FLOOD 52°	60	220-0898	220-0918
	TUNABLE WHITE 2700 - 6500				1319	14	90	IP54	VERY WIDE FLOOD 62°	55	220-0899	220-0919
HIGH OUTPUT	2700	3000	3500	4000	2128	24	90	IP20	WALLWASH	105	220-1020	220-1040
HIGH OUTPUT	2700	3000	3500	4000	1461	21	90	IP20	SPOT 14°	120	220-1021	220-1041
HIGH OUTPUT	2700	3000	3500	4000	2118	21	90	IP20	MEDIUM 34°	120	220-1022	220-1042
HIGH OUTPUT	2700	3000	3500	4000	2248	21	90	IP20	WIDE FLOOD 50°	105	220-1023	220-1043
HIGH OUTPUT	2700	3000	3500	4000	2394	21	90	IP20	VERY WIDE FLOOD 60°	100	220-1024	220-1044
HIGH OUTPUT	2700	3000	3500	4000	2038	24	90	IP54	WALLWASH	110	220-1030	220-1050
HIGH OUTPUT	2700	3000	3500	4000	1388	21	90	IP54	SPOT 14°	125	220-1031	220-1051
HIGH OUTPUT	2700	3000	3500	4000	2049	21	90	IP54	MEDIUM 34°	125	220-1032	220-1052
HIGH OUTPUT	2700	3000	3500	4000	2141	21	90	IP54	WIDE FLOOD 50°	110	220-1033	220-1053
HIGH OUTPUT	2700	3000	3500	4000	2272	21	90	IP54	VERY WIDE FLOOD 60°	105	220-1034	220-1054

* The installation depth may vary due to the selection of the driver


POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V




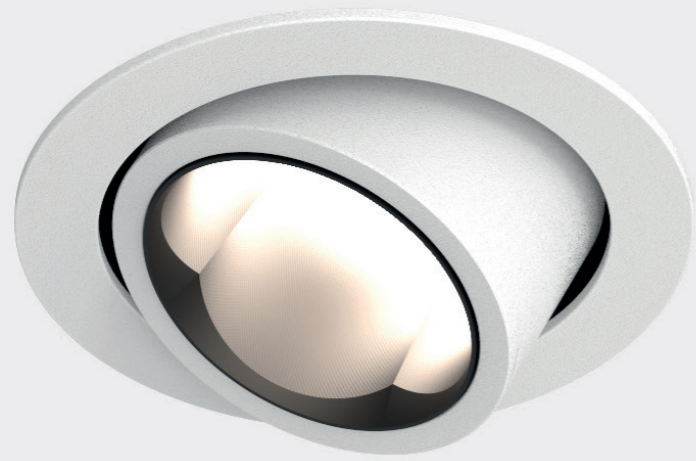

TRIMLESS
Ø 75 mm | 86 mm



RECESSED
Ø 75 mm | 68 mm



CONCRETE
Ø 95 mm | 86 mm

OIKO PRO ROUND ADJUSTABLE | RECESSED

ADJUSTABILITY



0-355° 25°


POWER

15 WATT


IP INTERNATIONAL PROTECTION

IP20


INSTALLATION

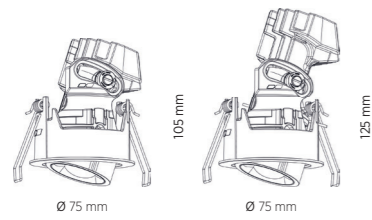

COLOR TEMPERATURE CCT

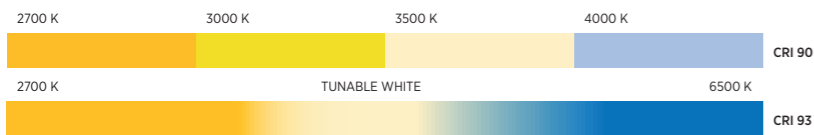

BEAMWIDTH



LENS PACK



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

OIKO PRO ADJUSTABLE



VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	INSTALLATION DEPTH MIN. mm *	ART.-N° TRIMLESS	ART.-N° RECESSED	ART.-N° CONCRETE	
	2700	3000	3500	4000	1220	16	90	IP20	SPOT	14°	120	120-0501	220-1111	220-1121
	2700	3000	3500	4000	1455	15	90	IP20	MEDIUM	34°	125	120-0502	220-1112	220-1122
	2700	3000	3500	4000	1455	15	90	IP20	WIDE FLOOD	50°	115	120-0503	220-1113	220-1123
	2700	3000	3500	4000	1545	15	90	IP20	VERY WIDE FLOOD	60°	105	120-0504	220-1114	220-1124
	TUNABLE WHITE 2700 - 6500				1129	15	90	IP20	FLOOD	36°	125	120-0507	220-1117	220-1127
	TUNABLE WHITE 2700 - 6500				1240	15	90	IP20	WIDE FLOOD	52°	115	120-0508	220-1118	220-1128
	TUNABLE WHITE 2700 - 6500				1381	15	90	IP20	VERY WIDE FLOOD	62°	105	120-0509	220-1119	220-1129

* The installation depth may vary due to the selection of the driver


POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V




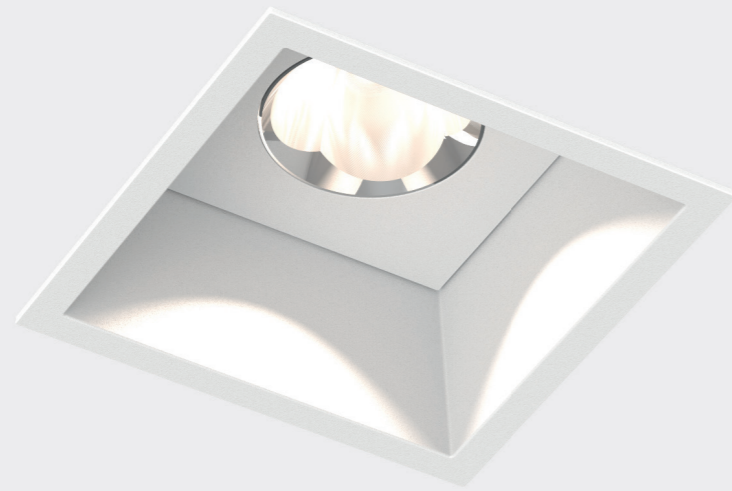

RECESSED
■ 74 mm



TRIMLESS
■ 74 mm

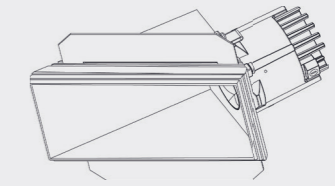

TRIMLESS
■ 74 x 140 mm

OIKO PRO SQUARE COMFORT | RECESSED

OIKO PRO SQUARE COMFORT

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	INSTALLATION DEPTH MIN. mm*	ART-N°	ART-N°	
	2700	3000	3500	4000							TRIMLESS	RECESSED	
	2700	3000	3500	4000	1582	14	90	IP20	VERY WIDE FLOOD	62°	110	120-0523	220-1143
ASYMMETRIC	2700	3000	3500	4000	1497	14	90	IP20	ASYM		105	120-0533	•

* The installation depth may vary due to the selection of the driver


POWER

14 WATT


IP INTERNATIONAL PROTECTION

IP20

INSTALLATION

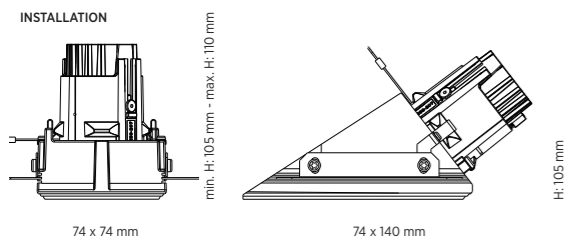

COLOR TEMPERATURE CCT



BEAMWIDTH

VERY WIDE FLOOD
62°



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request


POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V







OIKO PRO ROUND | SURFACE

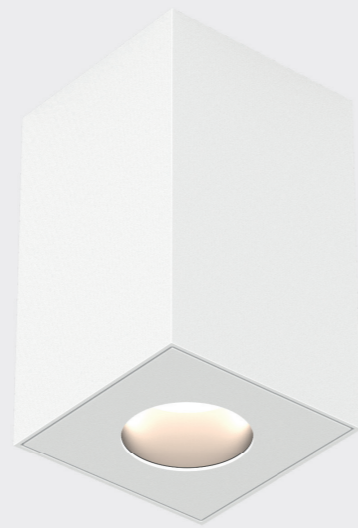

OIKO PRO SQUARE | SURFACE



ROUND
Ø 75 mm | H: 125 mm



SQUARE
■ 75 mm | H: 125 mm

POWER

14 WATT


IP INTERNATIONAL PROTECTION

IP20

INSTALLATION

TROUGH WIRING

COLOR TEMPERATURE CCT



BEAMWIDTH

WALLWASH



SPOT 14°



MEDIUM 34°



WIDE FLOOD 52°



VERY WIDE FLOOD 62°



LENS PACK

SPREAD LENS



SPREAD LENS LINEAR



HONEY COMB



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request


OIKO PRO SURFACE

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	ART-N° STANDARD	ART-N° DALI
ROUND	2700	3000	3500	4000	1289	14	90	IP20	WALLWASH	320-0830	420-0832
ROUND	2700	3000	3500	4000	1091	14	90	IP20	SPOT 14°	320-0840	420-0842
ROUND	2700	3000	3500	4000	1283	14	90	IP20	MEDIUM 34°	320-0850	420-0852
ROUND	2700	3000	3500	4000	1362	14	90	IP20	WIDE FLOOD 52°	320-0860	420-0862
ROUND	2700	3000	3500	4000	1451	14	90	IP20	VERY WIDE FLOOD 62°	320-0870	320-0872
SQUARE	2700	3000	3500	4000	1289	14	90	IP20	WALLWASH	320-0880	420-0882
SQUARE	2700	3000	3500	4000	1091	14	90	IP20	SPOT 14°	320-0890	420-0892
SQUARE	2700	3000	3500	4000	1283	14	90	IP20	MEDIUM 34°	320-0900	420-0902
SQUARE	2700	3000	3500	4000	1362	14	90	IP20	WIDE FLOOD 52°	320-0910	420-0912
SQUARE	2700	3000	3500	4000	1451	14	90	IP20	VERY WIDE FLOOD 62°	320-0920	320-0922


POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V







OIKO PRO ROUND | SUSPENDED

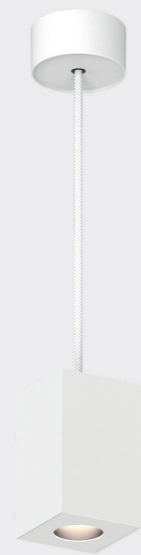

OIKO PRO SQUARE | SUSPENDED

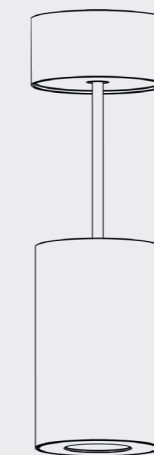

ROUND
Ø 75 mm | H: 125 mm

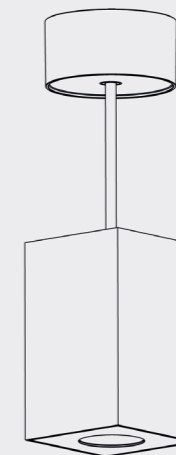

SQUARE
■ 75 mm | H: 125 mm

POWER

14 WATT


IP INTERNATIONAL PROTECTION

IP20

OIKO PRO PENDANT

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE		ART-N° STANDARD	ART-N° DALI
ROUND	2700	3000	3500	4000	1091	14	90	IP20	SPOT	14°	420-2360	420-2362
ROUND	2700	3000	3500	4000	1283	14	90	IP20	MEDIUM	34°	420-2370	420-2372
ROUND	2700	3000	3500	4000	1362	14	90	IP20	WIDE FLOOD	50°	420-2380	420-2382
ROUND	2700	3000	3500	4000	1451	14	90	IP20	VERY WIDE FLOOD	60°	420-2390	420-2392
SQUARE	2700	3000	3500	4000	1091	14	90	IP20	SPOT	14°	420-2520	420-2520
SQUARE	2700	3000	3500	4000	1283	14	90	IP20	MEDIUM	34°	420-2530	420-2532
SQUARE	2700	3000	3500	4000	1362	14	90	IP20	WIDE FLOOD	50°	420-2540	420-2542
SQUARE	2700	3000	3500	4000	1451	14	90	IP20	VERY WIDE FLOOD	60°	420-2550	420-2552


COLOR TEMPERATURE CCT



BEAMWIDTH



SUSPENSION CABLE: COLOR & LENGTH (2000 / 6000 mm)



COLOR




RAL Classic or any other special color on request

POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V



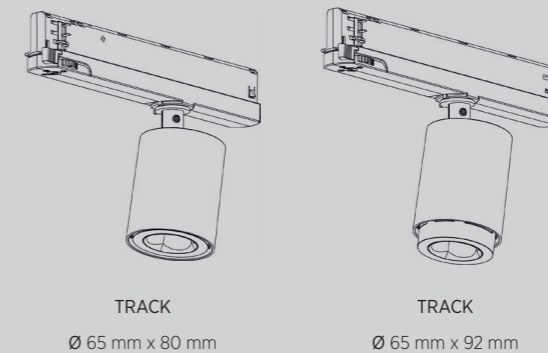

OIKO PRO IN


POWER

15 - 21 WATT


IP INTERNATIONAL PROTECTION

IP20

INSTALLATION

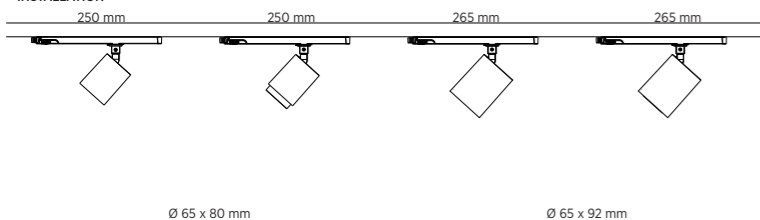

COLOR TEMPERATURE CCT



BEAMWIDTH



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

OIKO PRO IN | 3 PHASE TRACK

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	ART-N° STANDARD	ART-N° DALI
	2700	3000	3500	4000	1724	20	90	IP20	WALLWASH	330-1440	330-1442
	2700	3000	3500	4000	1461	21	90	IP20	SPOT 14°	330-1500	330-1502
	2700	3000	3500	4000	1603	20	90	IP20	MEDIUM 34°	330-1410	330-1412
	2700	3000	3500	4000	1759	21	90	IP20	WIDE FLOOD 50°	330-1420	330-1422
	2700	3000	3500	4000	1932	21	90	IP20	VERY WIDE FLOOD 60°	330-1430	330-1443
	TUNABLE WHITE 2700 - 6500				1213	15	90	IP20	WALLWASH	•	330-1592
	TUNABLE WHITE 2700 - 6500				1240	15	90	IP20	FLOOD 36°	•	330-1562
	TUNABLE WHITE 2700 - 6500				1070	15	90	IP20	WIDE FLOOD 50°	•	330-1572
	TUNABLE WHITE 2700 - 6500				1381	15	90	IP20	VERY WIDE FLOOD 62°	•	330-1582

OIKO PRO IN | 2LOOK4 50 TRACK

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	ART-N° STANDARD	ART-N° DALI
	2700	3000	3500	4000	1724	20	90	IP20	WALLWASH	7-02761-00	7-02761-02
	2700	3000	3500	4000	1461	21	90	IP20	SPOT 14°	7-02763-00	7-02763-02
	2700	3000	3500	4000	1603	20	90	IP20	MEDIUM 34°	7-02755-00	7-02755-02
	2700	3000	3500	4000	1759	21	90	IP20	WIDE FLOOD 50°	7-02757-00	7-02757-02
	2700	3000	3500	4000	1932	20	90	IP20	VERY WIDE FLOOD 60°	7-02759-00	7-02759-02
	TUNABLE WHITE 2700 - 6500				1213	15	90	IP20	WALLWASH	•	7-02762-02
	TUNABLE WHITE 2700 - 6500				1240	15	90	IP20	FLOOD 36°	•	7-02756-02
	TUNABLE WHITE 2700 - 6500				1070	15	90	IP20	WIDE FLOOD 50°	•	7-02758-02
	TUNABLE WHITE 2700 - 6500				1381	15	90	IP20	VERY WIDE FLOOD 62°	•	7-02760-02

POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V



DISCOVER MORE ON

WWW.PROLICHT.AT/OIKO





EDITOR Filippo Bettinzoli, PROLICHT
PROLICHT GmbH | Austria
6091 Neu-Götzens | Gewerbepark 9
T +43 5234 33 499 | F + 43 5234 33 499 22
marketing@prolicht.at | www.prolicht.at

TECHNICAL SUPPORT Romain Hoffmann

GRAPHIC DESIGN Tonia Wiedenmann

TEXT Julia Kopp

PRODUCT PHOTOS Armin Kuprian

PRODUCT RENDERINGS Aurel Petic, viewture.media, MOZING STUDIO

EDITION August 2023



 FOLLOW US ON
INSTAGRAM

WWW.PROLICHT.AT